

## CAMO® EDGE SCREW

**Size Range:** 4.2  
**Head Type:** Trim  
**Drive Type:** T15 Star  
**Point Type:** Rake



**Never use without CAMO Edge Guides and drive bit.**

**APPLICATION** Secures decking to wood substructure  
 For indoor or outdoor applications

**FEATURES** Available with ProTech coating or as Stainless Steel  
 Compatible with ACQ treated lumber  
 Rake tip removes board material as it bores in, reducing risk of splitting  
 Trim head design reduces visibility  
 Reverse upper thread pulls the board tight to the joist and provides a clean finish at entry point  
 Screws are installed on an angle for easy removal if board replacement is necessary


BOARD COMPATIBILITY	Pressure Treated	A4/A2 Stainless	Carbon Steel
	Composite	A4/A2 Stainless	Carbon Steel
PVC	A4/A2 Stainless	Carbon Steel	
Cedar	A4/A2 Stainless	-	
Redwood	A4/A2 Stainless	-	
Hardwood*	A4/A2 Stainless	-	*pre-drilling is recommended with hardwood decking

**COATING** Proprietary ProTech coating is designed to work with ACQ treated lumber  
 Provides 1500 hour corrosion protection per ASTM B117 test standard  
 ProTech coating is available only in green for this product  
 Stainless Steel screws are passivated per ASTM A380 standard  
 Black Phosphate coating used over stainless steel for less visibility  
 Black Phosphate coating may vary from dark gray to black in color

**SPECIFICATIONS** Uplift Test  
 CE Certified  
 Lateral Load in Hot/Cold


**INSTALLATION** Not recommended for use with impact drivers

**PENETRATION DEPTH**



Board Thickness	Dimension A	
	48 mm screw	60 mm screw
19 mm Board	33 mm	44 mm
22 mm Board	30 mm	41 mm
25 mm Board	26 mm	38 mm
38 mm Board	n/a	25 mm

**DIMENSIONS**

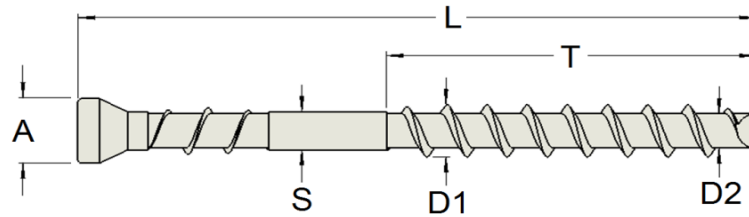

	Head Dia.	Overall Length	Major Thread Dia.	Minor Thread Dia.	Shank Dia.	Thread Length
	A	L	D1	D2	S	T
4.2 x 48 mm	Ø 5 mm	48 mm	3.84 mm	2.69 mm	2.94 mm	25 mm
4.2 x 60 mm	Ø 5 mm	60 mm	3.84 mm	2.69 mm	2.94 mm	30 mm

**CAUTION**



Screw must be entirely enclosed by the deck board and joist and not exposed in open or void areas

Not to be used for structural applications

Pre-Drilling is recommended for hardwood products


Not designed for use in aluminum, vinyl, stone, or rubber deck board products

Not designed for use with steel or other metal substructure components

No warranty is provided when the product is used in connection with incorrect applications

Read manufacturers' installation instructions for deck board products

When installing your deck with Hardwood follow the specific CAMO instructions as well as your local building standards for your specific application

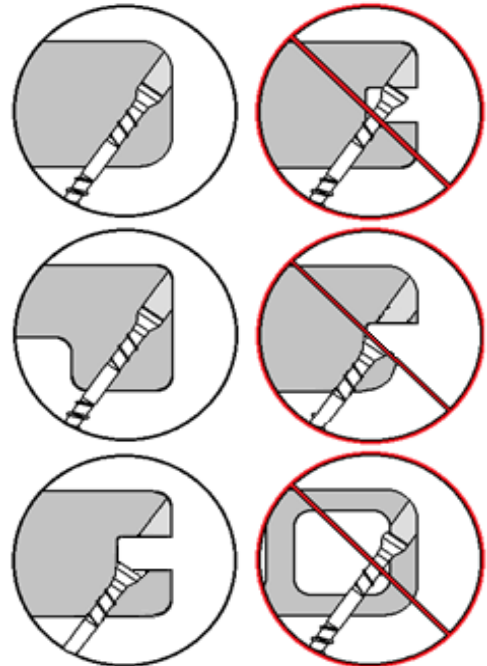

**PRODUCT AVAILABLE**

ProTech SKU Green	A4 Stainless SKU	Size x Length	Drive Bit (QTY) Size	Box Count QTY	Master Pack
345128	345228S	4.2 x 48 mm	(1) T15	350 ct	12 pack
345124	345224S	4.2 x 48 mm	(2) T15	700 ct	4 pack
345119	345219S	4.2 x 48 mm	(2) T15	1750 ct	1 pail
345148	345248S	4.2 x 60 mm	(1) T15	350 ct	12 pack
345144	345244S	4.2 x 60 mm	(2) T15	700 ct	4 pack
345139	345239S	4.2 x 60 mm	(2) T15	1750 ct	1 pail

A2 Stainless SKU	Size x Length	Drive Bit (QTY) Size	Box Count QTY	Master Pack
345739	4.2 x 60 mm	(1) T15	350 ct	12 pack
345744	4.2 x 60 mm	(2) T15	700 ct	4 pack
345748	4.2 x 60 mm	(2) T15	1750 ct	1 pail

345099	Drive Bit	(2) T15
345089	Drive Bit for Grooved Boards	(2) T15

